




TECHNICAL DATA:

Not easy accessible device,  
according to standard EN 1176-1:2017

Device dimensions:	4,74 x 5,66m
Device height:	4,30m
Minimum space:	7,22 x 9,30m
Falling area:	40,85m <sup>2</sup>
Critical fall height:	1,85m
Foundations depth:	-0,60m

Top view with falling area

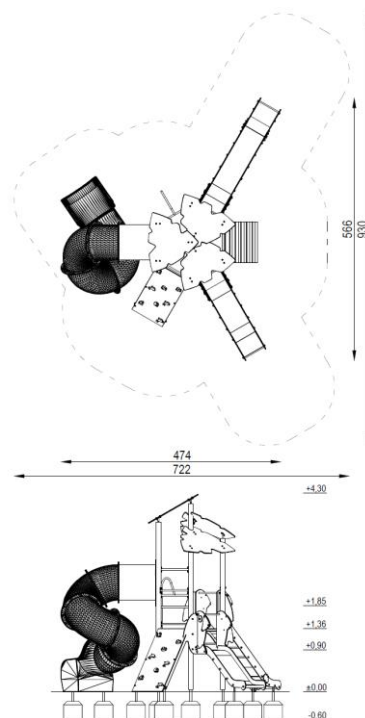

The device according to EN 1176-1:2017  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods

Safety surfaces: sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 200+100mm  
- synthetic surface according to critical fall height

## COMPONENTS:

Triangular tower without roof, platform 0,90m:	1 pc
Triangular tower without roof, platform 1,36m:	2 pcs
Triangular tower with roof, platform 0,90m :	1 pc
Triangular tower with roof, platform 1,36m :	1 pc
Triangular tower with roof, platform 1,85m:	1 pc
Vertical ladder :	4 pcs
Climbing wall 1,36m:	1 pc
Slope gangway 0,90m :	1 pc
Slide 0,90m :	1 pc
Slide 1,36m :	1 pc
Spiral slide 1,85m:	1 pc
Fireman's pole 1,36m :	1 pc

## MATERIALS:

Construction poles:	galvanized steel pipes, powder coated in gray
Anchors:	galvanized black steel
Flat decorative elements:	HDPE sheets,
Platforms, gangways:	waterproof plywood, coated with anti-slip layer, based on steel structure
Steel elements:	galvanized steel, powder coated
Surface of slope slide::	stainless steel,
Spiral slide:	polypropylene
Climbing walls:	waterproof plywood, climbing grips, based on resins
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.